





INSTALLATION INSTRUCTIONS

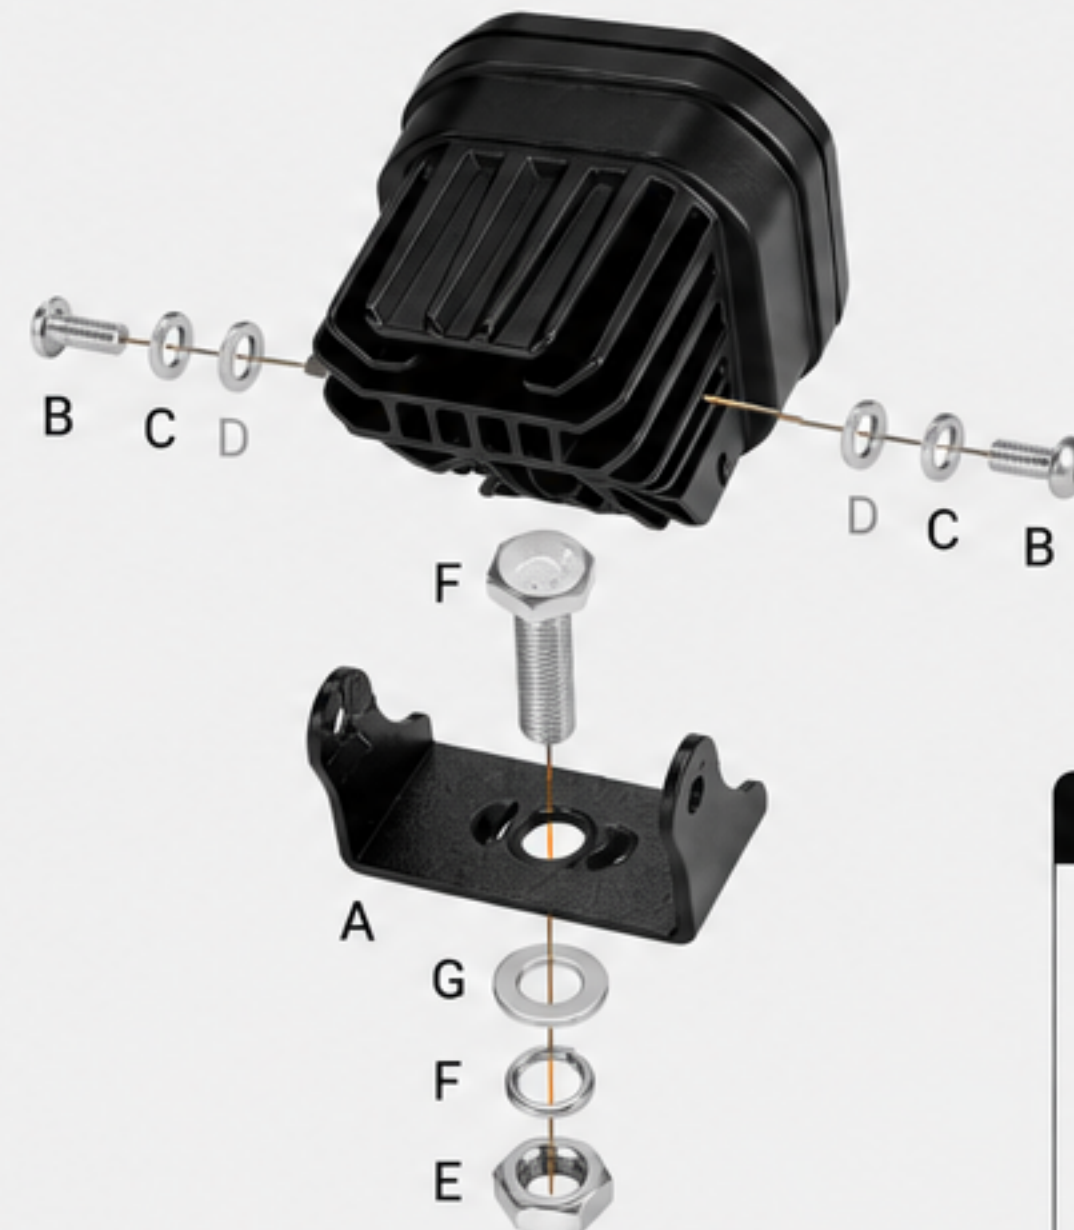

WIRING DIAGRAM

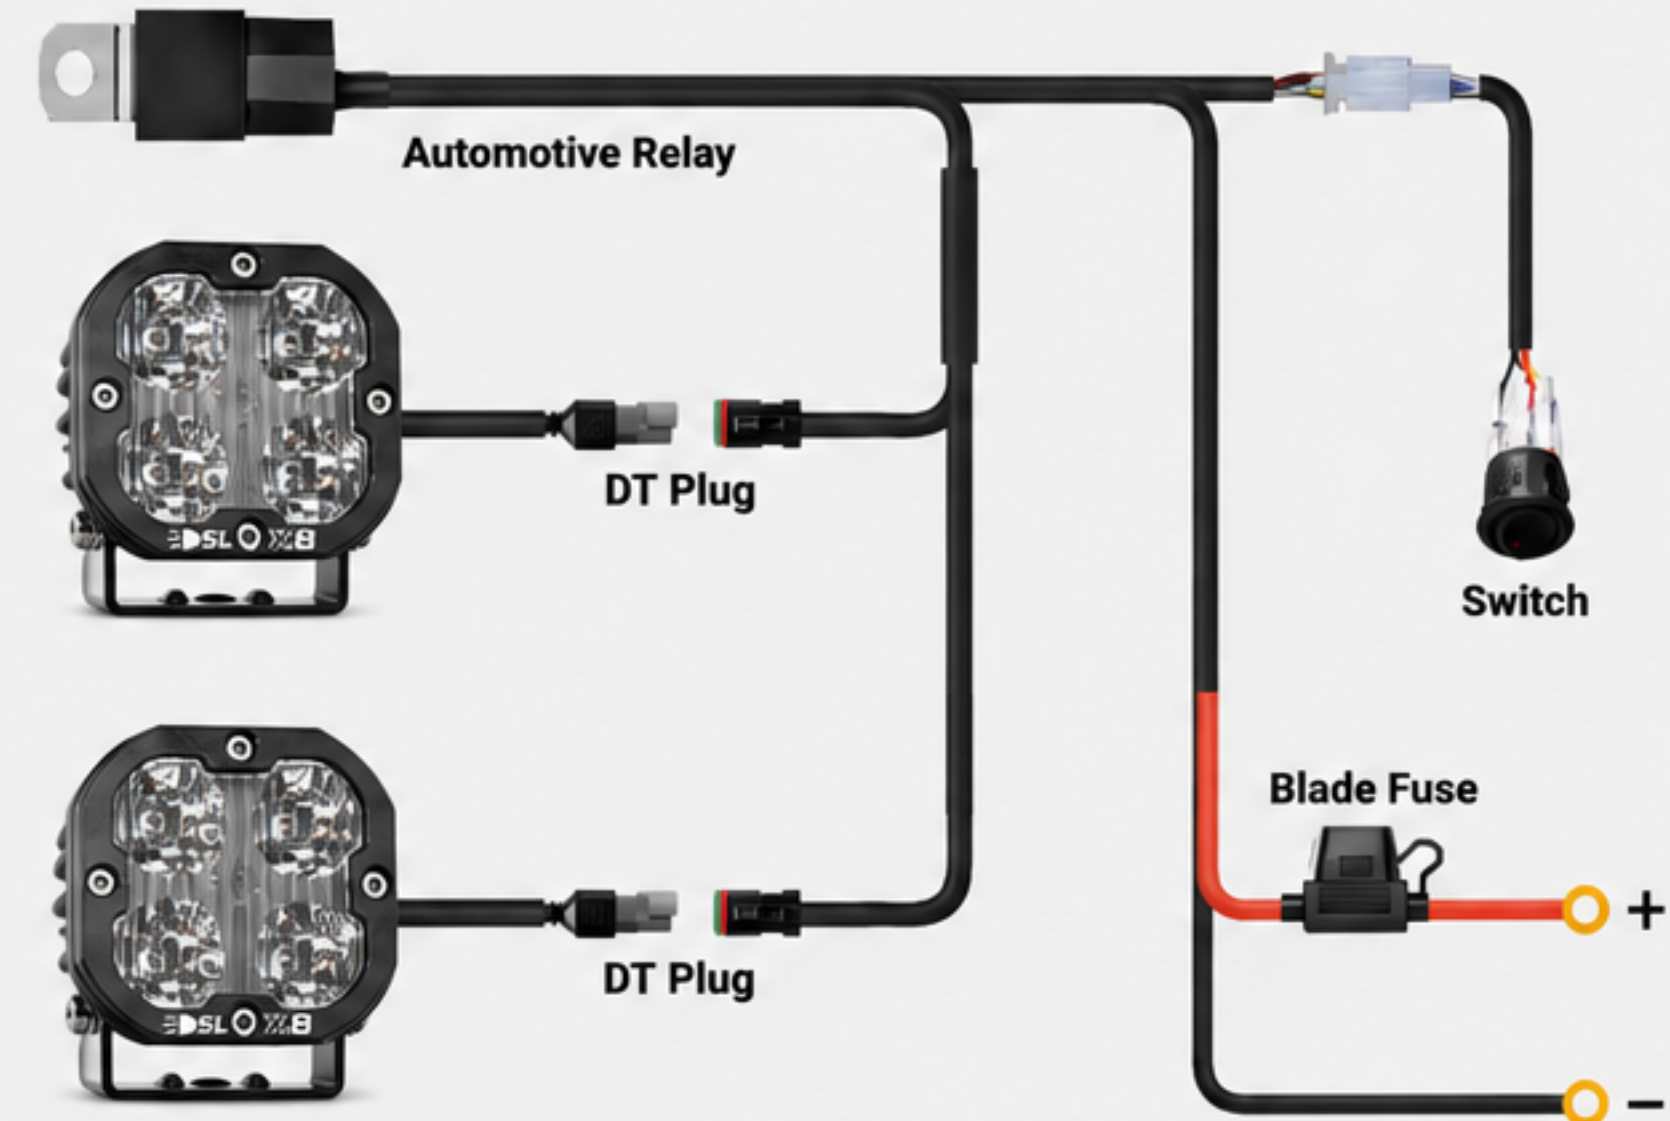

WIRING NOTES

- Connect the red wire to +12V through a fused power source.
- Connect the black wire to chassis ground (-).
- Use an automotive relay (30A or higher recommended).
- Make sure all connections are secure and weatherproof.

LEGEND

- Positive (+12V)
- Ground (-)
- DT Plug Connection



IMPORTANT: Verify all connections before powering on. Improper installation may cause damage to the light or vehicle.